AMS
SAFETY & COMFORT

CAMERA FOR GRIMME MAXTRON 620

VICAM-AMS-CAMPAL-GRIMME


PRODUCT DESCRIPTION

Item code : VICAM-AMS-CAMPAL-GRIMME

REPLACE YOUR BUILT-IN CAMERA WITH AN AMS CAMERA ON YOUR GRIMME MAXTRON 620



AMS CAMERA



CONNECTOR



BUILT-IN CONNECTOR ON THE MACHINE

COMPATIBLE WITH

- **SE** (75-20/140/75-55/260/150-60)
- **EVO** (280/290/290 AIR STEP)
- **VARITRON** (220/270 - 470)
- **REXOR** (6200/630-6300 AVANT 2021)
- **ROOTSTER** (604 - AVANT 2021)
- **MAXTRON 620**













DESIGNED AND ASSEMBLED BY AMS
FR

AMS Diffusion - Rue des Galeries - ZA du Chevalement - 59286 Roost Warendin - FRANCE
RCS DOUAI A 451 360 382 - CODE APE 4531Z - SIRET 451 360 382 00035 - TVA FR 55 451 360 382 - V01-032022

PRODUCT DESCRIPTION

Item code : VICAM-AMS-CAMPAL-GRIMME

CAMERA FOR GRIMME MAXTRON 620


VICAM-AMS-CAMPAL-GRIMME

DESCRIPTION



CAMERA

- Protection rating against solids and liquids : IP69K
- Operating temperature : -20°C +70°C
- Storage temperature : -30°C +80°C
- VGA : 976 x 582 pixels
- Integrated heating
- Night vision
- Night vision distance : 13.5 m
- Optimum visibility even in direct sunlight
- Mirror function integrated in the camera

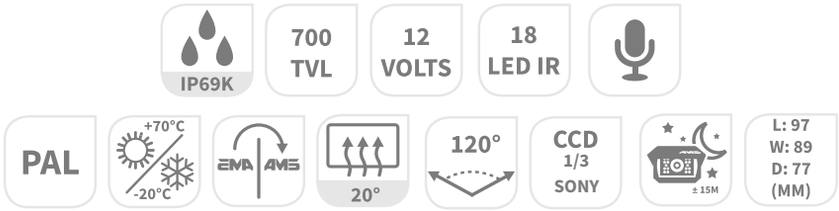

CONNECTOR

- 8 pin M12 male connector
- Length: 490 mm
- Compatible with MAXTRON, SE, EVO, VARI-TRON, REXOR, ROOTSER GRIMME



AMS Diffusion - Rue des Galeries - ZA du Chevalement - 59286 Roost Warendin - FRANCE
RCS DOUAI A 451 360 382 - CODE APE 4531Z - SIRET 451 360 382 00035 - TVA FR 55 451 360 382 - V01-032022

PRODUCT DESCRIPTION

Item code : VICAM-AMS-CAMPAL-GRIMME

CAMERA FOR GRIMME MAXTRON 620

VICAM-AMS-CAMPAL-GRIMME

INSTALLATION

Installation duration

15 MIN

Installation difficulty


EASY

#1 - REPLACE YOUR BUILT-IN CAMERA WITH AN AMS CAMERA

Position your AMS camera to avoid shaking. Pay attention to the orientation of the sunshade and the tilt of the camera.


You can connect your AMS camera to any of the following 6 available slots ● (GRIMME MAXTRON 620 EXAMPLE):

- Defoliation system (1 location)
- Rear view camera (1 slot)
- Funnel (2 slots)
- Drain mat (2 slots)

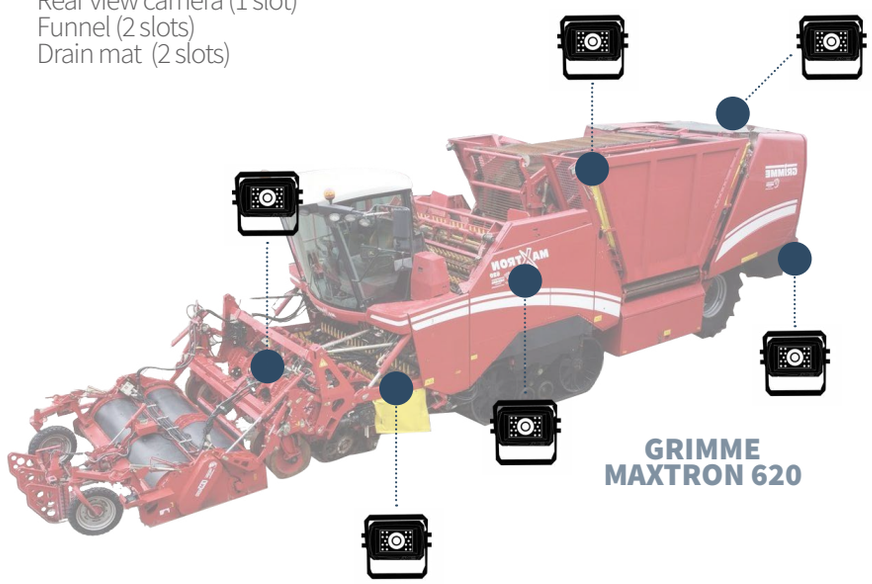


#2 - CONNECT THE CAMERA TO THE MACHINE'S BUILT-IN CONNECTOR

Simply connect the built-in connector to the connector on the AMS camera



#3 - CONNECT AND SET YOUR CAMERA

To activate mirror function manually please press on the button at the back of the camera.

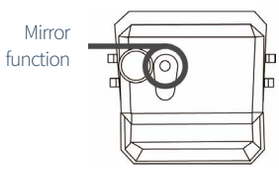

DESIGNED AND ASSEMBLED BY AMS

AMS Diffusion - Rue des Galeries - ZA du Chevalement - 59286 Roost Warendin - FRANCE
RCS DOUAI A 451 360 382 - CODE APE 4531Z - SIRET 451 360 382 00035 - TVA FR 55 451 360 382 - V01-032022

SAFETY & COMFORT

CAMERA FOR GRIMME MAXTRON 620

VICAM-AMS-CAMPAL-GRIMME

PRODUCT DESCRIPTION

Item code : VICAM-AMS-CAMPAL-GRIMME

TESTS

Test your devices:

> Position your devices where you want them.
> Connect the devices without permanently plugging in the connections.
> Switch on the system.
> Test the function of the components together.
> Adjust the camera(s) to get the desired view (angle of view).
> When you are satisfied with the operation of the system, permanently install the devices and connections.

PERMANENT CONNECTION

When installing electrical connections:

> Avoid attaching the cables to moving parts (e.g. steering column, rack, pulley, etc.)
> Insulate all connections and fittings against water and dust.
> Protect the cables from mechanical stress by fixing them.

Make sure your connections are:

> are not kinked or twisted. If there is excess cable, do not roll the cable onto a roll, but form a serpentine.
> Do not rub on metal edges.
> not be placed in passages with sharp edges without (Use cable gland or cable gland).



2 YEARS Warranty

SAV Online form

contact@ams-diffusion.com